



20x30 Two Bay Garage

Call toll-free: 1.866.297.3760

A new design to help you with your garage needs. The two overhead garage doors have enough clearance for large pick up trucks, tractors, and ATV equipment. The full size loft accommodates general storage needs and/or can be used as a game or activity space. Choose a stairwell instead of the ladder access for easy accessibility; additionally consider the second story traditional loft door entrance with pulley. This design is true mortise and tenon joinery.

Hand made in Vermont, from native rough sawn hemlock and pine lumber, the pre-cut lumber package includes all fastening hardware, roofing, and step-by-step plans. Designed for the beginner to intermediate carpenter the kit pieces are color-coded and part-numbered. The kit will ship as a curbside truckload sale to give you the best possible price for delivery. Pictures of client-modified kits do not depict option A designs and may contain windows, doors, siding or hardware not included in the pre-cut kit.

Known foundation style is recommended for accurate quote.


- Included in the kit:**
- All Fastening Hardware
 - Step-by-Step Plans

Specifications:


- Square Footage:** 1200 sq/ft includes 600 sq/ft Upper Level
- Overall dimensions:** 20'4" wide x 30'4" long x 20' height
- Recommended Foundation:** Concrete Slab
- Floor:** Double 2x10 Treated Sill Plate
- Walls:** 8x8 Hemlock Post & Beam Wall Framing
Wall Height 144"
- Doors:** Single 2-8 Nine-light Steel Factory Door
Two 8'w x 8'h Overhead Doors
- Windows:** Single 3x2 8-light Fixed Barn Sash Window
- Roof:** 2x8 Rafters 16" on center
8/12 Gable Roof Pitch
Solid Sheathed 4 Quarter 1x10 Kiln Dried Pine
Green Corrugated Metal Roofing -29 Gauge
- Siding:** 1x10 Shiplap Pine
1" Pine Fascia and Shadow Boards
1" Pine Trim Detail & 1" Soffit Backing
- Wood Louvered Vent** on Each Gable End
- Loft:** 4' Wide Ladder Access (Optional Stairwell Entrance)
Joists 4x6 Rough 24" on center
1x10 Pine Board Flooring
- Loft Floor Rating:** 25 lbs/ sq ft or 10lbs/sq ft w/ clear span

Assembly Time: 2 People 60 Hours

Kit Weight: 4 Cubes totaling 18,000 lbs
To accept delivery have enough room to receive a full size truck and a minimum 5K forklift will be required to unload.

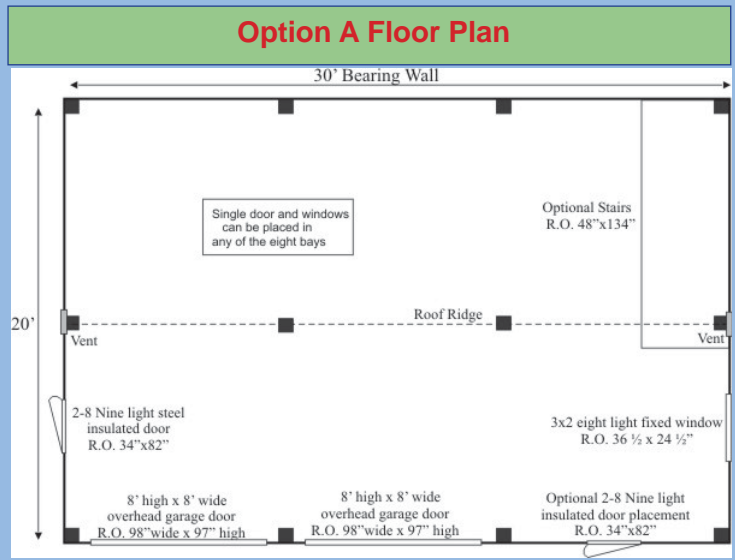

Option B Floor Plan
Having the overhead doors on the 20' gable end is a more versatile idea.

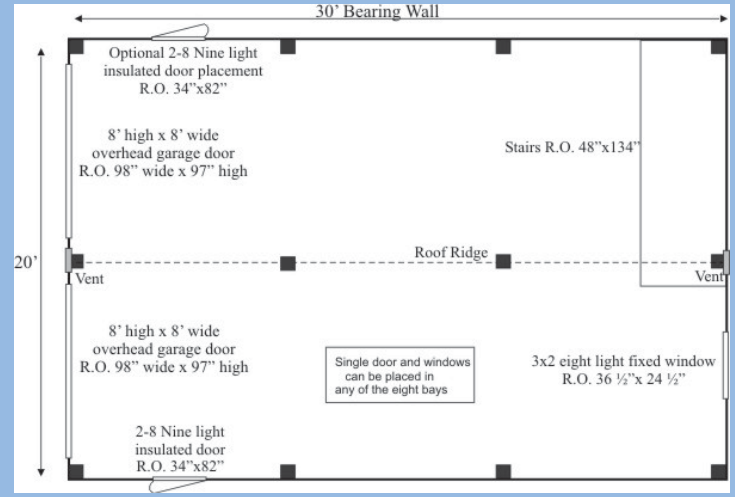

Additional Options

| | |
|--|------------|
| Flooring System | \$1,896 |
| 2x10 Hemlock FL Joist 16" on Center- 3/4 CDX | |
| Clear Span | \$423 |
| Removal of Center Posts | |
| Garage Door Opener | \$299 each |
| Stairwell | \$4,295 |
| Drop Down Stairs | \$TBD |

Pre-Cut Kit \$22,836

The rough sawn native Vermont lumber package has all the pieces cut and ready for assembly. The fasteners, hardware, windows, and doors are included as well as the step by step plans. The kit is geared to a do-it-yourself homeowner

Plans \$50.00

Jamaica Cottage Shop, Inc. engineered the plans for our designs to do-it-yourself homeowners. The detailed plans include foundation options, a shopping list, and a color coded cut list. The trigonometry of the roof triangles has all been simplified with tracing the cut out roof templates. The plans are set for full dimensional lumber and provide a clear