



## 4 x 8 Saltbox Woodbin

Call toll-free: 1.866.297.3760

Start the wood-burning season off right! Old timers here in Vermont say “get your wood stacked by Labor Day”. The best way to cure firewood is to keep it dry and allow the air to pass through it. The Wood Bin design does just that, it is attractive and practical firewood storage.

A cord of firewood measures 4x4x8 or 128 cubic feet. The cottage is designed to hold a cord plus of wood. The woodbin has a heavy 2x6 floor frame and is sheathed with 1” rough sawn barn board floor. The curious roofline of this salt box roof adds to the character of the building, while shedding the snow off the sides and out of the way, not to interfere with accessing your firewood.

Hand made in Vermont, from native rough sawn hemlock and pine lumber, this cottage is delivered fully assembled to your prepared site. Rugged post and beam techniques, passed down through the centuries, are used to construct this sturdy picturesque retreat, reminiscent of old New England. Have your own Vermont cabin in the woods!

All of our wood sheds, storage sheds, outdoor storage sheds, garden sheds, storage shed kits, cottages and utility enclosures are built of the finest Vermont lumber and handcrafted for long life and durability. New England weather can really put a wood garden shed or cottage to the test, and Jamaica Cottage Shop’s products have proven to stand the test of time and strength.

### Specifications:

**Square Footage:** 32 sq ft

**Overall dimensions:** 9’ 6”wide x 4’10” deep x 8’6” high


**Recommended Foundation:** 3” – 4” crushed gravel

**Floor:** Two 4x6x8’ Hemlock Skids  
2x6 Hemlock 24” on center  
1” Rough Sawn square edge Hemlock floor

**Walls:** 4x4 post and beam wall framing  
60” Left Wall Height 52” right Wall Height

**Roof:** 2x6 rafters 24” on center  
12/12 left roof pitch 6/12 Right roof pitch  
1x4 Strapping 20” on center  
Green corrugated metal roofing

**Siding:** 1” thick rough cut Pine Board siding  
1” rough sawn Pine trim includes fascia, shadow, corner, door & window trim

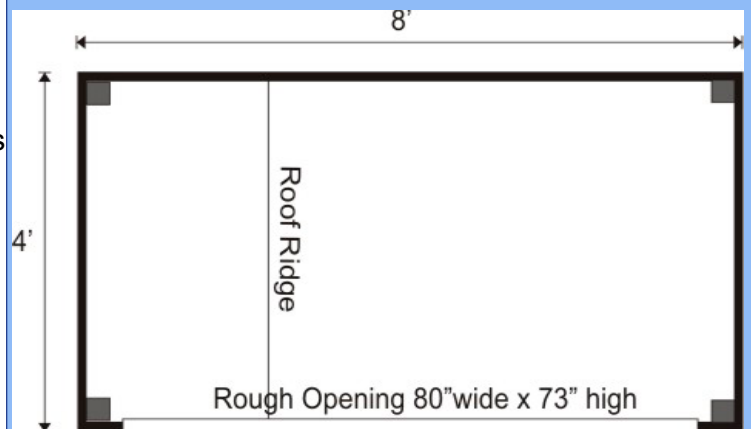

**Fully Assembled \$1,681**

Fully assembled from native rough sawn lumber here at our manufacturing facility, this design is delivered to your client prepared, truck accessible site in one piece. The building is set and leveled by our delivery crew and ready to use when we leave your site. Due to road restrictions, fully assembled models are available in the northeastern United States only.